



MAXDER GROUP S.R.L.

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703



THE WORLD LEADER IN
FUME EXTRACTION TECHNOLOGY

codice 12200

AD 250

LASER

Last Updated on 17.09.2018



For light duty on laser marking, coding and engraving.

BOFA's Advantage 250 fume extraction and filtration system has been designed to provide a cost effective solution for light duty applications. This compact and extremely quiet system is ideal for use in schools, sign making workshops, small scale industrial environments and light laser coding applications.

Technology



DeepPleat pre
filter



HEPA filter



Reverse flow air
(RFA) technology



Advanced carbon
filter (ACF)
technology



ProTECT service
plan



SureCHECK
quality standard

Key features of the AD 250

Blower with high airflow
Standard

Filter condition indicator
Standard

DeepPleat pre filter
Standard

Remote stop / start interface
Optional

Low cost replacement filters
Standard

Low noise levels
Standard

VOC gas sensor (Volatile Organic Compound)
Optional

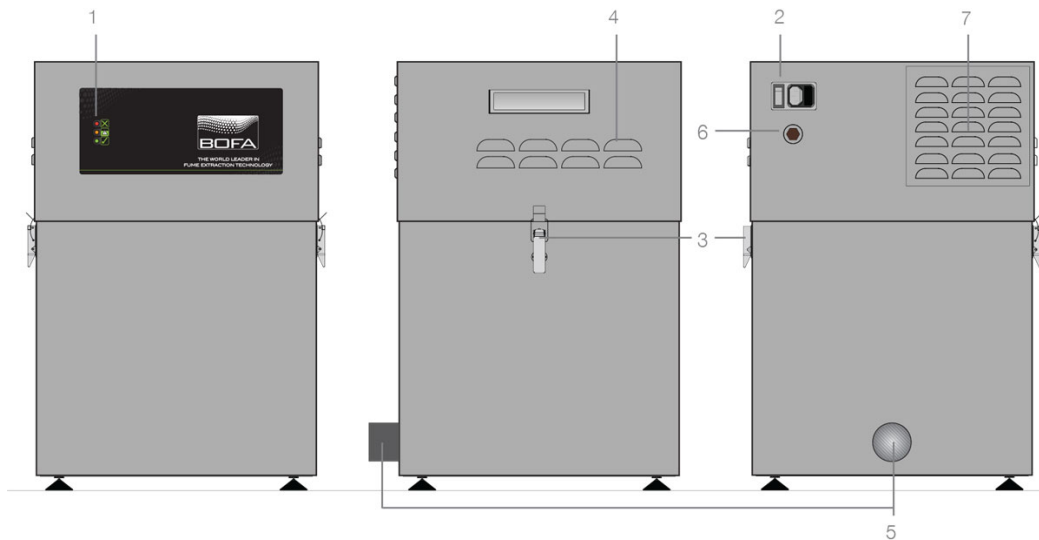
Filter change / system fail signal
Optional

Contact MAXDER at WWW.MAXDERBANCHI.COM









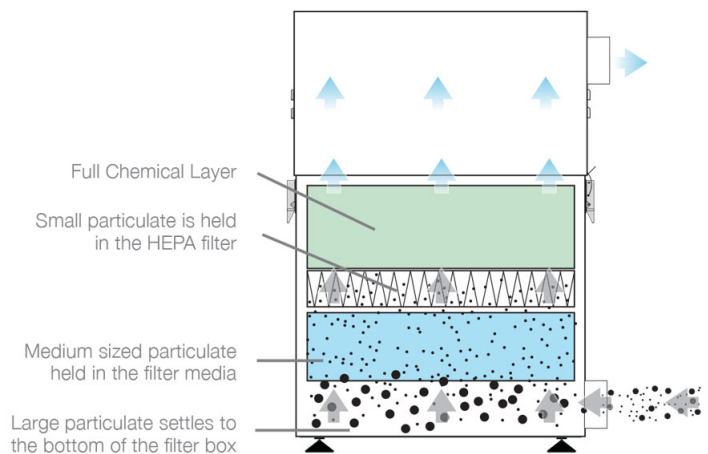
Technical specification

- 1. Unit/filter condition display 2. On/off switch - power inlet 3. Filter compartment latch 4. Motor cooling in and out
- 5. Hose inlet connection - 50mm 6. Signal / interface cable 7. Exhaust outlet



Airflow through filters

-  Chemical Filter
-  HEPA Filter
-  Pre Filter
-  Clean air
-  Contaminated air
-  Particulate



Technical data

	EU	US
Dimensions (HxWxD)	590 x 405 x 465 mm	23.23 x 15.94 x 18.31"
Cabinet construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel
Airflow/pressure	180m³/hr / 30mbar	106cfm / 30mbar
Electrical data	230v 1ph 50/60Hz Full load current: 0.9 amps / 135 watts	115v 60/50Hz Full load current: 1.2 amps / 135 watts
Noise level	< 66dBA (at typical operating speed)	< 66dBA (at typical operating speed)
Weight	35kg	77lbs
Approvals	CE	cUL, UL



MAXDER GROUP S.R.L.

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703

DeepPleat Pre Filter specifications

Surface media area	6m² approx (64.56 ft²)
Filter media	Glass fibre
Filter media construction	100mm maxi fold construction with webbing spacers (0.32 ft)
Filter housing	Cardboard
Filter efficiency	95% @ 0.9 microns

Combined HEPA / Gas filter specifications

HEPA filter media	Glass fibre
HEPA media construction	Maxi pleat construction with webbing spacers
Gasket	Neoprene with adhesive backing
Filter housing	Zintec mild steel
Treated activated carbon	8.5kgs (18.7 lbs)
Filter efficiency	99.997% @ 0.3 microns

Part numbers

Model	Voltage	Part No.	24V stop / start	Filter change / System failure signal	VOC monitoring	Hose kit - 50mm
AD 250 stainless steel	230V	L0452A	A2001	A2002	A2003	A1020007
AD 250 stainless steel	115V	L0451A	A2001	A2002	A2003	A1020007
AD 250 powder coated	230V	L0442A	A2001	A2002	A2003	A1020007
AD 250 powder coated	115V	L0441A	A2001	A2002	A2003	A1020007

Replacement filters

Model	DeepPleat Pre Filter	Combined HEPA / Gas Filter
AD 250	A1030056	A1030055



MAXDER GROUP S.R.L.

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703