



MAXDER GROUP S.R.L.

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703



THE WORLD LEADER IN
FUME EXTRACTION TECHNOLOGY

codice 12240

AD 350

LASER

Last Updated on 29.08.2018



Fume extraction system for light duty laser marking, coding and engraving applications.

BOFA's Advantage 350 fume extraction and filtration system effectively removes potentially harmful fumes and particulates created during the laser marking process. By maintaining a dust-free operating area, the system helps to protect valuable equipment, maintain a higher quality mark, and reduce the number of rejects and contaminants.

The quiet and compact Advantage 350 is ideal for use in light duty laser marking applications, including schools, sign making workshops and small scale industrial environments.

Technology



DeepPleat pre
filter



HEPA filter



Reverse flow air
(RFA) technology



Advanced carbon
filter (ACF)
technology



Multi voltage
sensing (MVS) unit



ProTECT service
plan



SureCHECK
quality standard

Key features of the AD 350

Blower with high airflow and pressure
Standard

Filter condition indicator
Standard

Digital flow control system
Standard

VOC gas sensor (Volatile Organic Compound)
Optional

Filter change / system fail signal
Optional

Low cost replacement filters
Standard

Low noise levels
Standard

Nitrogen Dioxide sensor
Optional


Remote stop / start interface
Optional

Contact MAXDER at WWW.MAXDERBANCHI.COM







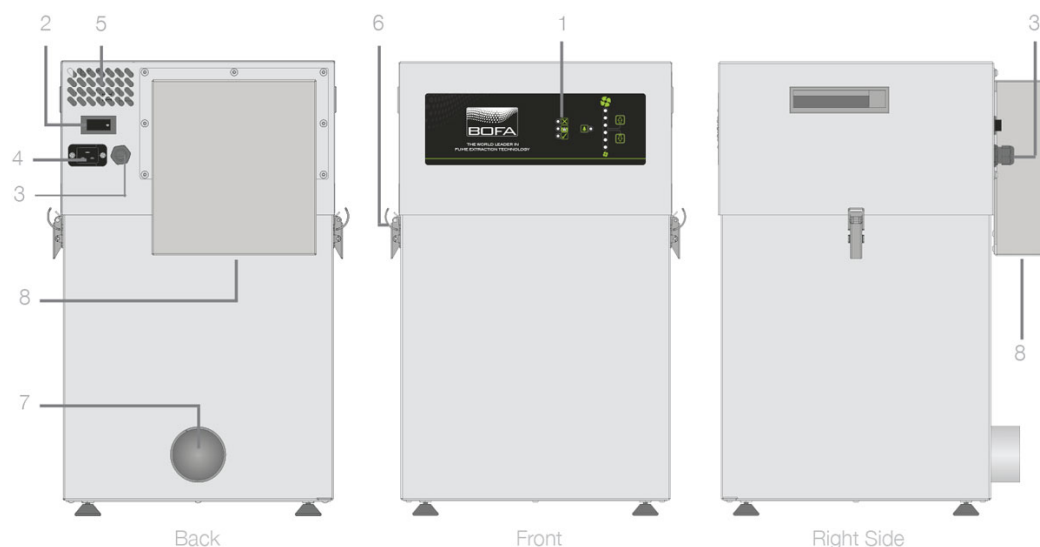


Technical specification

- | | | | |
|-----------------------------|------------------|----------------------------------|----------------------|
| 1. Filter Condition Display | 2. On/Off Switch | 3. Signal / Interface Cable | 4. Power Cable Inlet |
| 5. Motor Cooling Inlet | 6. Filter Latch | 7. Hose Inlet Connection - 100mm | 8. Exhaust Outlet |



Airflow through filters

-  Chemical filter
-  HEPA filter
-  Pre filter
-  Clean air
-  Contaminated air
-  Particulate

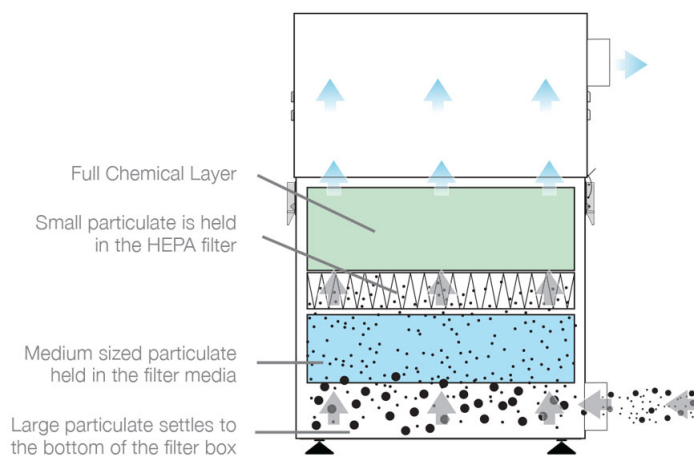

Technical data

	EU	US
Dimensions (HxWxD)	590 x 405 x 465 mm	23.23 x 15.94 x 18.31"
Cabinet construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel
Airflow / pressure	380m³/hr / 96mbar	223cfm / 96mbar
Electrical aata	115-230v 1ph 50/60Hz Full load current: 12.5 amps / 1.1kw	115-230v 1ph 50/60Hz Full load current: 12.5 amps / 1.1kw
Noise level	< 62dBA (at typical operating speed)	< 62dBA (at typical operating speed)
Weight	35kg	77lbs
Approvals	CE	cUL, UL



MAXDER GROUP S.R.L.

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703

DeppPleat Pre Filter specifications

Surface Media Area	6m² approx (64.5 ft²)
Filter Media	Glass Fibre
Filter Media Construction	100mm DeepPleat construction with Webbing Spacers (0.32ft)
Filter Efficiency	95% @ 0.9 microns

Combined Filter specifications

HEPA Filter Media	Glass Fibre
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers
Filter Housing	Zintec Mild Steel
Treated Activated Carbon	9kgs (19.8 lbs)
Filter Efficiency	99.997% @ 0.3 microns

Unit part numbers

Model	Voltage	Part No.	24V stop / Start	Filter change / System failure signal	VOC Monitoring
AD 350 powder coated	90 - 257V	L0542A0000	A2001	A2002	A2003
AD 350 with NOx sensor powder coated	90 - 257V	L0542A8212	A2001	A2002	A2003

Replacement filter part numbers

Model	DeepPleat Pre Filter	Combined HEPA / Gas Filter
AD 350	A1030056	A1030055
AD 350 with NOx sensor	A1030056	A1030355



MAXDER GROUP S.R.L.

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703

