

AVVITATORE AD ARIA COMPRESSA FULL AUTO SHUT-OFF FP045

- ampio range di coppia 0,05-28Nm con motori duraturi nel tempo
- strumento che combina arte, ergonomia e design
- alta precisione garantita
- modalità di selezione della coppia facile e intuitiva
- vibrazioni ridotte al massimo
- basso rumore di lavoro
- vincitore del premio EXCELLENT TOOL

Air Tool



SUMAKE
MAKE JOBS BETTER THAN EVER



RoHS CE ISO 9001

Dati tecnici

Codice	16999
Velocità	800 r.p.m
Range di coppia	0,8 - 4,5 N.m
Peso	600g
Rumore	72dB
Consumo aria	0,30 m ³ / min






www.maxderbanchi.com



Patented MSC cross-path patent clutch system (Automatic start-off type)
The one pulse has the merits of low vibration (less than 2.5ms²) and low torque deviation (±3%).

Patented SUMAKE ergonomic grip
More comfortable for operator to raise efficiency.

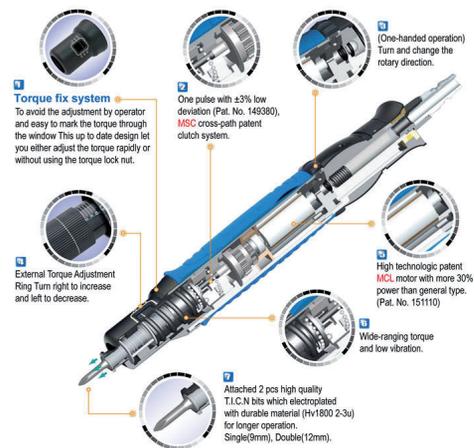

Patented MCL cross switch control system (Automatic start shut-off type)
MCL cross switch motor provide 40% more power and torque than general type.

Patented MSC clutch system.
More wider range of torque when patented motor used.