

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703



THE WORLD LEADER IN **FUME EXTRACTION TECHNOLOGY** 

# **codice 11876**

## V 600

#### **ELECTRONICS**





Centralised fume extraction system for solder applications.

BOFA's high end range of extraction systems combine large filter capacity with high airflows and pressure. The V 600 high volume extraction system offers protection against harmful fumes. This unit incorporates 3 stage filtration, filter condition display, and built in silencing. A truly state of the art fume purification solution.

#### **Technology**



DeepPleat pre filter



**HEPA filter** 



Reverse flow air (RFA) technology



Multi voltage sensing unit (MVS)



Advanced carbon filter (ACF) technology



**ProTECT service** plan



#### Key features of the V 600

Blower with high airflow and pressure Standard

Digital speed control Standard

Filter condition display Standard

Long life filters with low replacement costs Standard

Filter change / System fail signal Optional

3 stage filtration Standard

DeepPleat pre filter

Standard

Built in silencing Standard

Remote stop / start interface Optional

Contact MAXDER at WWW.MAXDERBANCHI.COM
















### **Technical specification**

- 1. Filter condition display
- 5. Motor cooling inlet
- 2. On / off switch
- 6. Filter latch
- 3. Signal / interface cable
- 7. Hose inlet connection 75mm (x2)
- 4. Power cable inlet
- 8. Exhaust outlet

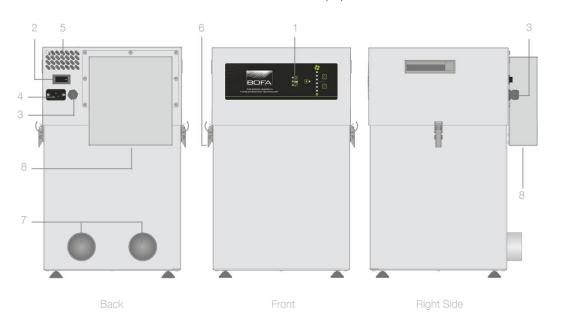

### Airflow through filters



Chemical filter



HEPA filter



Pre filter




Clean air



Contaminated air



Particulate

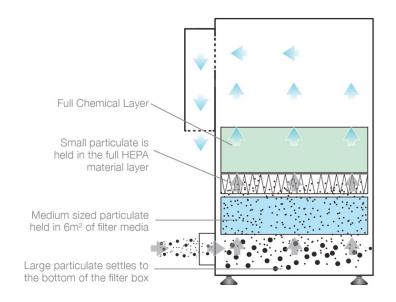

Unit part numbers					
Model	Voltage	24V Stop/Start with override	Filter condition signal	VOC sensor	Part number
V 600 powder coated	90-257V	No	No	No	E1142A0000
V 600 powder coated	90-257V	No	No	Yes	E1142A0002
V 600 powder coated	90-257V	Yes	Yes	No	E1142A0003
V 600 powder coated	90-257V	Yes	Yes	Yes	E1142A0004



Technical data				
	EU	US		
Dimensions (HxWxD)	590 x 405 x 465mm	23.23 x 15.94 x 18.31"		
Cabinet construction	Powder coated mild steel	Powder coated mild steel		
Airflow / Pressure	350m³/hr / 96mbar	206cfm / 96mbar		
Electrical data	90-257v 1ph 50/60Hz Full load current: 12.5 amps / 1.1kw	90-257v 1ph 50/60Hz Full load current: 12.5 amps / 1.1kw		
Noise level	< 60dBA (at typical operating speed)	< 60dBA (at typical operating speed)		
Weight	35kgs	77lbs		
Approvals	CE	CE		

DeepPleat pre filter specifications			
Surface media area	6m² approx (64.56 ft²)		
Filter media	Glass fibre		
Filter media construction	Pleated		
Filter efficiency	F8 (95% @ 0.9 microns)		

Combined filter specifications	
HEPA filter media	Glass fibre
HEPA media construction	Maxi Pleat construction with webbing spacers
Gas filter	Treated activated carbon
Filter housing	Zintecmild steel
Treated activated carbon	7.5kgs (16.5 lbs)
Filter efficiency	99.997% @ 0.3 microns

Specifications	
Maximum number of 32mm Arms	6
Maximum number of 50mm Arms, Cowls or Down Draft Trays	4
Maximum number of 75mm Arms, Cowls or Down Draft Trays	2
(Dependent on installation)	

Replacement filters		
Description	Part number	
DeepPleat pre filter	A1030119	
Combined filter	A1030118	



### Arm accessories



Hose kit - one per bench needed if ordering from the table below				
Letter reference	Description	Main items	Part number	
A (50mm)	Hose kit to connect each bench for 50mm arm/accessory.	50mm to 75mm 'T' piece, 75mm x 2.5m flexible hose, 1m x 50mm flexible hose	A1020376	
B (75mm)	Hose kit to connect each bench for 75mm arm/accessory.	75mm 'T' piece, 2 x 75mm x 2.5m flexible hose	A1020375	

50mm Accessories			
Used with hose kit ref	Number reference	Description	Part number
A (50mm)	1	32mm ESD Stay putarm with funnel	A1020044
A (50mm)	2	32mm ESD Stay put arm with nozzle	A1020046
A (50mm)	3	50mm ESD Stay put arm with funnel	A1020045
A (50mm)	4	50mm ESD Stay put arm with nozzle	A1020047
A (50mm)	5	50mm ESD Stay put arm with slot	A1020049
A (50mm)	6	38mm Stainless steel ESD Stay put arm with nozzle	A1020160
A (50mm)	7	38mm Stainless steel ESD Stay put arm with funnel	A1020184
A (50mm)	8	50mm ESD Stay put arm with plenum funnel	A1020179
A (50mm)	9	Light arm - White	A1020168
A (50mm)	10	Light arm - Black	A1020169



75mm Accessories			
Used with hose kit ref	Number reference	Description	Part number
B (75mm)	11	75mm ESD Stay put arm 1m with funnel	A1020042
B (75mm)	12	75mm ESD cowl (black)	A1020039
B (75mm)	13	75mm Clear cowl	A1020038
B (75mm)	14	75mm ESD Down draft tray	A1020041



# **MAXDER GROUP S.R.L.**

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703

