



MAXDER GROUP S.R.L.

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703



THE WORLD LEADER IN
FUME EXTRACTION TECHNOLOGY

codice 15811

AD Access

LASER

Last Updated on 29.08.2018



A compact and competitively priced fume extraction system for light duty laser marking, coding and engraving applications.

The introduction of low cost laser systems has led to the development of an entry level fume extraction solution in order to maintain safe operator working conditions and product quality.

The AD Access combines economic ownership with performance to match the small laser user. A three stage filter condition indicator is included as a standard feature, together with three stage filtration: DeepPleat pre filter, HEPA and chemical section.

Technology



DeepPleat pre
filter



HEPA filter



Advanced carbon
filter (ACF)
technology



ProTECT service
plan



SureCHECK
quality standard

Key features of the AD Access

Filter condition indicator
Standard

Advanced carbon filter technology (ACF)
Standard

Low noise levels
Standard

VOC gas sensor (Volatile Organic Compound)
Optional

Filter change / System fail signal
Optional

DeepPleat pre filter
Standard

Long life, low cost replacement filters
Standard

Small footprint
Standard


Remote stop / start interface
Optional

Contact MAXDER at WWW.MAXDERBANCHI.COM







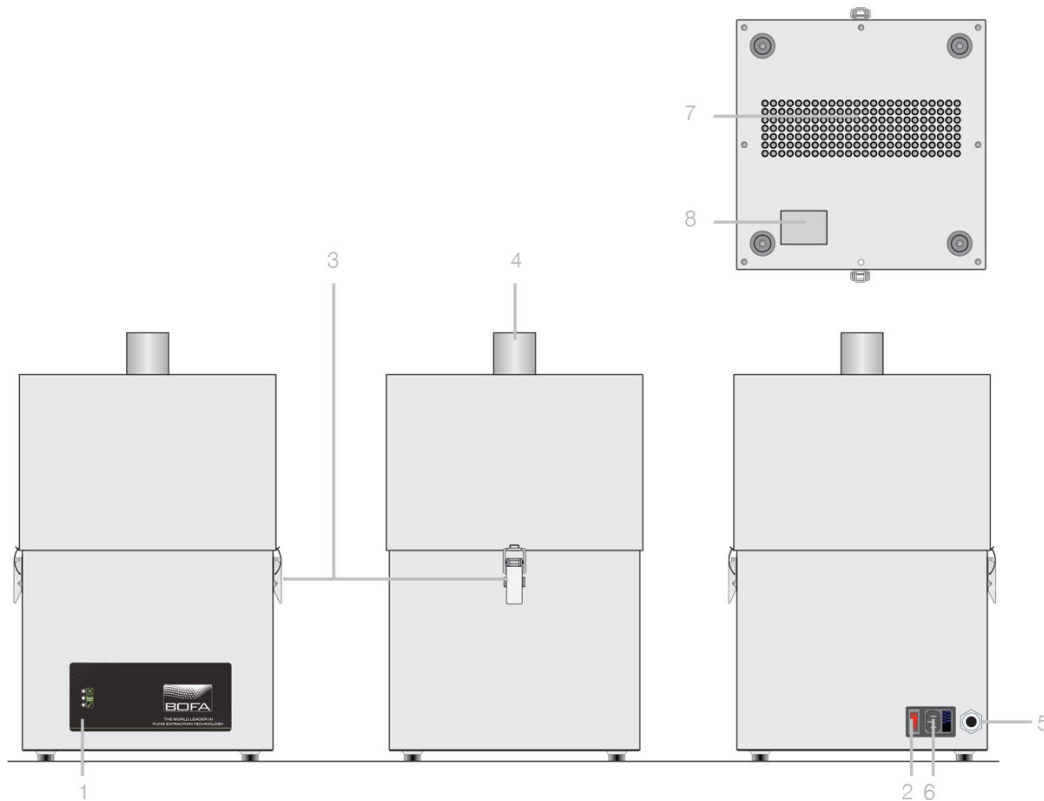


Technical specification

- | | | | |
|------------------------------------|----------------------|-----------------------------|---------------------------------|
| 1. Unit / Filter condition display | 2. On/off switch | 3. Filter compartment latch | 4. Hose inlet connection - 50mm |
| 5. Signal / Interface cable | 6. Power cable inlet | 7. Motor cooling inlet | 8. Exhaust outlet |



Airflow through filters

-  Chemical filter
-  HEPA filter
-  Pre filter
-  Clean air
-  Contaminated air
-  Particulate

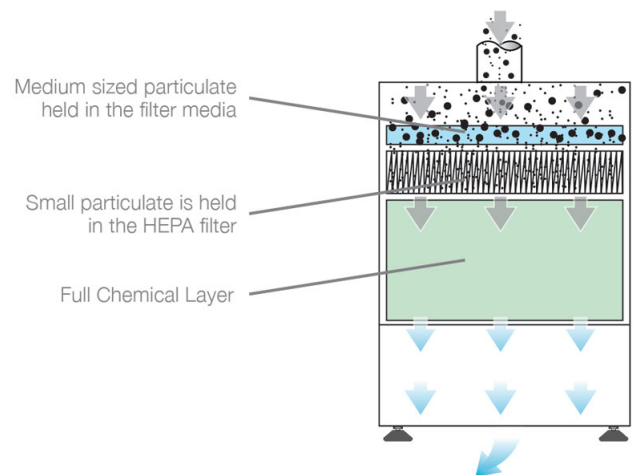

Technical data

	EU	US
Dimensions (HxWxD)	505 x 335 x 315mm	19.88 x 13.19 x 12.40"
Cabinet construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel
Airflow / Pressure	180m ³ /hr / 30mbar	106cfm / 30mbar
Electrical data	230v 1ph 50/60Hz Full load current: 0.9 amps / 135 watts	115v 50/60Hz Full load current: 1.2 amps / 135 watts



MAXDER GROUP S.R.L.

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703

Technical data		
Noise level	< 61dBA (at typical operating speed)	< 56dBA (at typical operating speed)
Weight	24kg	52.8lbs
Approvals	CE	cUL, UL

DeepPleat pre filter specifications	
Surface media area	1.74m ² approx (18.7 ft ²)
Filter media	Glass fibre
Filter media construction	50mm maxi fold construction with webbing spacers (0.16ft)
Filter efficiency	95% @ 0.9 microns

Combined filter specifications	
HEPA filter media	Glass fibre
HEPA media construction	Maxi fold construction with webbing spacers
Filter housing	Zintec mild steel
Treated activated carbon	7 Kgs approx (15.4 lbs)
Filter efficiency	99.997% @ 0.3 microns

Part numbers						
Model	Voltage	Part no.	24V Stop / Start	Filter change / System failure signal	VOC monitoring	Hose kit
AD Access Stainless steel	230V	L1852A	A2001	A2002	A2003	A1020007
AD Access Powder coated	230V	L1842A	A2001	A2002	A2003	A1020007
AD Access Powder coated	115V	L1841A	A2001	A2002	A2003	A1020007

Replacement filters		
Model	DeepPleat pre filter	Combined HEPA / Gas filter
AD Access	A1030153	A1030154



MAXDER GROUP S.R.L.

via Ludwig Van Beethoven 24 Cinisello Balsamo 20092 (Mi) www.maxderbanchi.com Tel.026600703

